
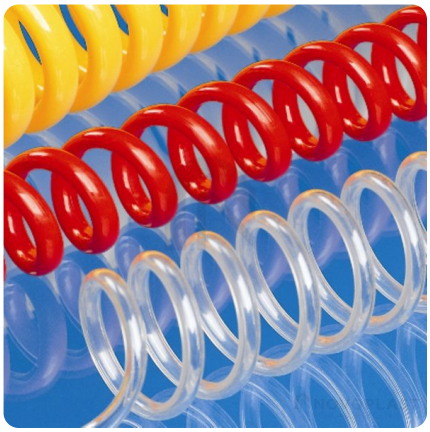




Master-Tube PUR 98A Spiral

Spiralised PU tubing for industrial and pneumatic applications, temperature- and UV-resistant, abrasion-resistant, halogen-free, customisable working length and outlets, with or without connecting elements

spiral-free

metal-free

Product Details

Construction / Material

- Type of construction: extruded hose without metal spiral
- Execution of the wall: made of highly abrasion-resistant material, extruded

Properties

- Chemical Properties: good resistance to oil, good UV resistance, halogen-free, plasticiser-free, free from paint wetting impairment substances (LABS)
- Mechanical Properties: kink-resistant, elastic behaviour under mechanical stress, high resistance to stress corrosion cracking, high mechanical strength and impact resistance
- Physical Properties: flexible at low temperatures, good damping behaviour, good dielectric properties
- Other: good recovery properties

Operating Temperature

- Temperature Range: -40 to 85 °C

Delivery Information

- Delivery, type of production: inner diameter: 1.0 - 33.0 mm, outer diameter: 1.5 - 40.0 mm

Application Areas

- Areas of application: Agriculture, Automotive, Plant & Mechanical Engineering, Robotics & Automation, Industry, Semiconductor Industry, Bulk & Construction, Sea & Rail transport, Wood, Chemistry, Surface Technology, Waste Disposal & Cleaning Technology, Plastics, Conveying, lifting & feeding technology, White Goods, Textile, Printing & Paper, Vehicle Construction, Metal & Toolmaking

Customizing Options

- optional item modification (on request): other colours, spiral version

Article Variants

Nominal Size (DN) in mm	Inner diameter in mm	Outer diameter in mm	Bending radius* in mm	Weigth in g/m	Operating pressure in bar	Length (standard lengths available for order) in m	Wall thickness in mm	Tolerance inner & outer diameter in mm
2,0	2,0	4	20	11	20		1,00	± 0,10
2,7	2,7	4	20	9	11		0,65	± 0,10
3,0	3,0	5	25	15	15		1,00	± 0,10
4,0	4,0	6	30	19	12		1,00	± 0,10
5,0	5,0	8	40	37	13		1,50	± 0,10
5,5	5,5	8	40	32	11		1,25	± 0,10
5,7	5,7	8	40	30	10		1,15	± 0,10
6,0	6,0	8	40	27	8		1,00	± 0,10
6,5	6,5	10	50	55	12		1,75	± 0,10
7,0	7,0	10	50	49	10		1,50	± 0,10
8,0	8,0	10	50	34	6		1,00	± 0,10
8,0	8,0	12	60	77	12		2,00	± 0,15
9,0	9,0	12	60	60	8		1,50	± 0,15
11,0	11,0	16	80	129	11		2,50	± 0,20

Delivery Variants

Available in other lengths, other nominal diameters, with customer-specific customer-specific imprint.

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+420 374 629 469**

Product requests via: **https://www.masterflex.cz/**

Headquarters for your sales area

MASTERFLEX Česko s.r.o.

Průmyslová 917
348 15 Planá
Czech Republic